


<b>JOB:</b>	<b>REPRESENTATIVE:</b>		
<b>UNIT TAG:</b>	<b>ORDER NO.</b>	<b>DATE:</b>	
<b>ENGINEER:</b>	<b>SUBMITTED BY:</b>	<b>DATE:</b>	
<b>CONTRACTOR:</b>	<b>APPROVED BY:</b>	<b>DATE:</b>	



Dual Unit Valves

# Lead Free\* Combination Valves

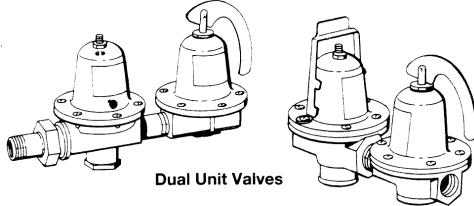

**DESCRIPTION**

Combination (Dual Unit) Valves combine the functions of pressure reducing (fill) valve and a non-code pressure reducing relief valve. Both Valves are equipped with an EPDM diaphragm. The diaphragm operated relief valve operates with a low differential between opening and closing pressures. The diaphragm operated pressure reducing valve is equipped with an inlet strainer and built-in low inlet pressure check valve.

Models with "F" prefix feature fast fill. Models ending with "TU" feature 1/2 sweat/NPT union.

**CONSTRUCTION**

Lead Free Brass\* body with corrosion resistant internal components.

\*contains less than .25% lead by weight on wetted surfaces

MODEL NUMBER	PART NUMBER	COMPONENT VALVES	BODY MAT'L	CONNECTIONS INCHES		DIMENSIONS INCHES		APPROX. SHIP. WT. LBS(Kg)	TAGGING INFORMATION	QTY.
				BOILER	FILL	BETWEEN CONNECTIONS	OVERALL HEIGHT			
8	110199LF	RELIEF	Lead Free* BRASS	1/2 NPT	1/2 NPT	6-7/16 (163.5)	5-3/8 (136.5)	4 (1.8)		
		B-38	Lead Free* BRASS		1/2 NPT					
F-3	110197LF	RELIEF	Lead Free* BRASS	1/2 NPT	1/2 NPT	6-7/16 (163.5)	6 (152.4)	3-3/4 (1.7)		
		FB-38	Lead Free* BRASS		1/2 NPT					
F-3TU	110198LF	RELIEF	Lead Free* BRASS	1/2 NPT	1/2 UNION	8-5/8 (219.1)	6 (152.4)	4 (1.8)		
		FB-38TU	Lead Free* BRASS		NPT/SWEAT					

MAXIMUM OPERATING TEMPERATURE 225 °F(107 °C) - MAXIMUM WORKING PRESSURE 125 PSIG (862 kPa)

**PRESSURE SETTING**

RELIEF VALVE: 30 PSI (206 kPa) STANDARD; NOT FIELD ADJUSTABLE  
REDUCING VALVE: 12 PSI (83 kPa) STANDARD; FIELD ADJUSTABLE RANGE: 10 TO 25 PSI (69 to 172 kPa)

**TYPICAL SPECIFICATIONS**

Furnish and install as shown on plans, a combination pressure reducing (fill) valve, and non-code pressure relief valve both of which shall be equipped with EPDM diaphragm to facilitate operation of the valves and to protect the non-wetted components from the system fluid. The pressure reducing valve shall also has a brass inlet strainer and integral low inlet pressure check valve.

The pressure reducing valve shall be set to limit the system fill pressure to \_\_\_\_\_ psig, and the pressure relief valve shall be set to relieve system overpressure at 30 psig.

Each combination valve shall be Xylem Bell & Gossett Model No. \_\_\_\_\_ Dual Unit.

Xylem Inc.  
8200 N. Austin Avenue  
Morton Grove, IL 60053  
Phone: (847)966-3700  
Fax: (847)965-8379  
www.bellgossett.com

